


## OVERVIEW

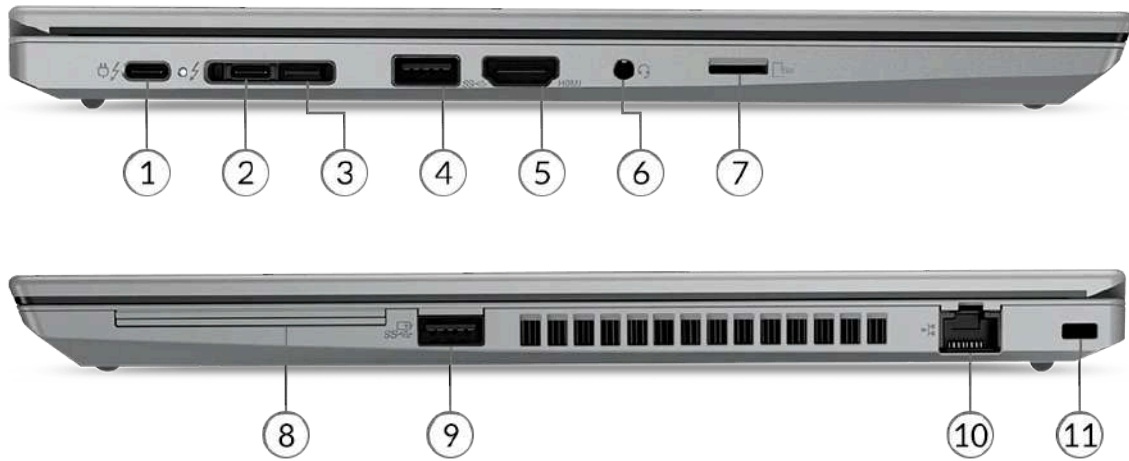

1. Thunderbolt 4	7. MicroSD card reader
2. Thunderbolt 4	8. Smart card reader *
3. Side docking connector	9. USB 3.2 Gen 1 (Always On)
4. USB 3.2 Gen 1	10. Ethernet (RJ-45)
5. HDMI 2.0	11. Kensington Security Slot
6. Headphone / microphone combo jack (3.5mm)	

Notes:

- Ports with \* are only available on selected models
- Optional nano-SIM card slot on the rear side (not shown on the sample product above)
- The combination of 1, 2 and 3 is side docking connector

## PERFORMANCE

### Processor

#### Processor Family

11th Generation Intel® Core™ i5 / i7 Processor

#### Processor

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Core i5-1135G7	4	8	2.4GHz	4.2GHz	8MB	DDR4-3200	Intel Iris® Xe Graphics
Core i5-1145G7	4	8	2.6GHz	4.4GHz	8MB	DDR4-3200	Intel Iris Xe Graphics
Core i7-1185G7	4	8	3.0GHz	4.8GHz	12MB	DDR4-3200	Intel Iris Xe Graphics
Core i7-1165G7	4	8	2.8GHz	4.7GHz	12MB	DDR4-3200	Intel Iris Xe Graphics

### Operating System

#### Operating System

- Windows® 10 Home 64
- Windows 10 Pro 64
- Red Hat Enterprise Linux (certified only)
- Ubuntu Linux
- No operating system

### Graphics

#### Graphics<sup>[1]</sup>

Graphics	Type	Memory	Key Features
Intel UHD Graphics	Integrated	Shared	DirectX® 12
Intel Iris Xe Graphics	Integrated	Shared	DirectX 12
NVIDIA® Quadro® T500	Discrete	4GB GDDR6	DirectX 12

#### Notes:

1. Intel Iris Xe Graphics requires dual channel memory. On models with single channel memory, Intel Iris Xe Graphics will function as Intel UHD graphics.

### Monitor Support

#### Monitor Support<sup>[1]</sup>

Supports up to 4 independent displays via native display and 3 external monitors; supports external monitors via Thunderbolt™ (5K@60Hz) or HDMI® (up to 4K@60Hz)

#### Notes:

1. Refresh rates >60hz also supported, however max resolution will be limited

### Chipset

#### Chipset

Intel SoC (System on Chip) platform

### Memory

#### Max Memory<sup>[1]</sup>

- Up to 48GB (16GB soldered + 32GB SO-DIMM)
- Up to 40GB (8GB soldered + 32GB SO-DIMM)

#### Memory Slots

One memory soldered to systemboard, one DDR4 SO-DIMM slot, dual-channel capable

#### Memory Type

DDR4-3200 non-ECC

#### Notes:

# ThinkPad P15s Gen 2

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

## Storage

### Storage Support

One drive, up to 2TB M.2 2280 SSD

### Storage Slot<sup>[1]</sup>

One M.2 2280 PCIe Gen 3 slot, supports one M.2 PCIe Gen 4 or Gen 3 SSD

### Storage Type<sup>[2]</sup>

Disk Type	Interface	RPM	Offering	Security
M.2 2280 SSD	PCIe NVMe, PCIe 3.0	-	256GB / 512GB / 1TB	Opal2
M.2 2280 SSD	PCIe NVMe, PCIe 4.0	-	2TB	Opal2

### RAID

No support

### Notes:

1. M.2 PCIe Gen 4 SSD in a M.2 PCIe Gen 3 slot runs at PCIe Gen 3 speeds
2. System comes with one M.2 SSD slot that supports PCIe 3.0

## Removable Storage

### Card Reader

MicroSD card reader

## Multi-Media

### Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

### Speakers

Stereo speakers, 2W x2, Dolby® Audio™

### Microphone

- Dual array microphone, far-field
- No microphone

### Camera

- 720p, with privacy shutter, fixed focus
- IR & 720p hybrid, with privacy shutter, fixed focus
- No camera

## Battery

### Battery

Integrated Li-Polymer 57Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter

### Max Battery Life<sup>[1]</sup>

Battery life data is still under tuning and pending availability

### Notes:

1. All battery life claims are approximate maximum and based on results using the MobileMark® 2014, MobileMark 2018, and/or JEITA 2.0 battery-life benchmark tests. Actual battery life will vary and depends on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

## Power Adapter

### Power Adapter

- 45W USB-C AC adapter (2-pin)
- 45W USB-C AC adapter (3-pin)
- 65W USB-C slim AC adapter (3-pin)
- 65W USB-C slim AC adapter (2-pin)
- 65W USB-C AC adapter (2-pin)
- 65W USB-C AC adapter (3-pin)

- No power adapter

## DESIGN

### Display

#### Display<sup>[1]</sup>

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle	Key Features
15.6"	FHD (1920x1080)	None	IPS	300 nits	Anti-glare	16:9	800:1	45% NTSC	170°	-
15.6"	FHD (1920x1080)	Multi-touch	IPS	300 nits	Anti-glare	16:9	800:1	45% NTSC	170°	-
15.6"	UHD (3840x2160)	None	IPS	600 nits	Anti-glare	16:9	1400:1	100% Adobe® RGB	170°	Dolby Vision™, HDR 400

#### Color Calibration

- X-Rite Pantone factory color calibration (UHD display)
- No color calibration

#### Touchscreen

- On-cell touch, supports 10-point touch
- Non-touch

#### Notes:

1. California Electronic Waste Recycling Fee

In California, per state law, Lenovo charges an electronic waste recycling fee on this covered device at the time of sale of the product. For more information, go to <https://www.calrecycle.ca.gov/Electronics/Consumer>

### Input Device

#### Pen

No support

#### Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls

#### Keyboard Backlight

- LED backlight
- No support

#### UltraNav™

TrackPoint® pointing device and Mylar® surface multi-touch touchpad

### Mechanical

#### Dimensions (WxDxH)

365.8 x 248 x 19.1 mm (14.40 x 9.76 x 0.75 inches)

#### Weight<sup>[1]</sup>

Models	Weight
Aluminium models	1.783 kg (3.93 lbs)
PC + ABS models	1.75 kg (3.86 lbs)

#### Case Color

- Black
- Storm grey

#### Case Material

- PC + ABS (top), PC + ABS / Talc15 + magnesium alloy (keyboard cover), PA / 50% GF (bottom)
- Aluminium (top), PC + ABS / Talc15 + magnesium alloy (keyboard cover), PA / 50% GF (bottom)

#### Notes:

1. The system weight varies depending on configurations

## CONNECTIVITY

### Network

#### Onboard Ethernet

- Gigabit Ethernet, Intel Ethernet Connection I219-V (non-vPro models)
- Gigabit Ethernet, Intel Ethernet Connection I219-LM (vPro models)

#### WLAN + Bluetooth™

- Intel Wi-Fi 6 AX201, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2
- Intel Wi-Fi 6E AX210, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2
- None

#### WWAN

- Wireless WAN upgradable to 4G
- Integrated Mobile Broadband 4G LTE, Quectel EM120R-GL, M.2 card, with embedded eSIM functionality
- Integrated Mobile Broadband 4G LTE, Quectel EM160R, MIMO 4x4, M.2 card, with embedded eSIM functionality
- No support

#### SIM Card

- eSIM
- No SIM card inbox

#### NFC

- Near Field Communication
- No support

### Ports<sup>[1]</sup>

#### Standard Ports<sup>[2]</sup>

- 1x USB 3.2 Gen 1
- 1x USB 3.2 Gen 1 (Always On)
- 2x Thunderbolt 4 / USB4™ 40Gbps / USB-C 3.2 Gen 2 (support data transfer, Power Delivery 3.0 and DisplayPort™ 1.4)
- 1x HDMI 2.0
- 1x microSD card reader
- 1x Ethernet (RJ-45)
- 1x headphone / microphone combo jack (3.5mm)
- 1x side docking connector

#### Optional Ports

1x Smart card reader

#### Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.  
USB 2.0: 480 Mbit/s;  
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;  
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;  
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;  
Thunderbolt 3: 40 Gbit/s;  
FireWire 400: 400 Mbit/s;  
FireWire 800: 800 Mbit/s
2. Depending on many factors, actual data transfer speed may be lower than theoretical speed

### Monitor Cable

#### Monitor Cable

- Lenovo HDMI to VGA Monitor Adapter
- Lenovo USB-C to DisplayPort Adapter
- Lenovo USB-C to VGA Adapter

## SECURITY & PRIVACY

### Security

**Security Chip**

- Discrete TPM 2.0, TCG certified
- Firmware TPM 2.0 integrated in chipset
- Disabled (in some regions)

**Physical Locks**

Kensington® Security Slot

**Smart Card Reader**

- Smart card reader
- No smart card reader

**Fingerprint Reader**

- Touch style fingerprint reader on palm rest, match-on-chip
- No fingerprint reader

**BIOS Security**

- Supervisor password
- Power-on password
- NVMe password
- Self-healing BIOS

**MANAGEABILITY****System Management****System Management**

- Intel vPro Technology, DASH
- None

**SERVICE****Warranty****Base Warranty**

- 1-year depot service
- 1-year depot with 2-year system board service
- 1-year limited onsite service
- 1-year + 2-year depot service
- 1-year + 2-year limited onsite service
- 3-year (1-yr battery) depot service
- 3-year (1-yr battery) limited onsite service
- No base warranty

**ENVIRONMENTAL****Operating Environment****Temperature<sup>[1]</sup>**

- Storage and transportation in original shipping packaging: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

**Humidity**

Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

**Altitude**

Maximum altitude (without pressurization): 3048 m (10,000 ft)

**Notes:**

1. When you charge the battery, its temperature must be no lower than 10°C (50°F)

**ACCESSORIES**

## Bundled Accessories

### Bundled Accessories

None

## CERTIFICATIONS

### Green Certifications

#### Green Certifications

- EPEAT™ Gold
- ENERGY STAR® 8.0
- TCO Certified Notebooks 8
- RoHS compliant

### Other Certifications

#### Mil-Spec Test

MIL-STD-810H military test passed

### ISV Certifications

#### ISV Certifications

Please visit [www.thinkworkstations.com/isv-certifications/](http://www.thinkworkstations.com/isv-certifications/)

LaptopVANG.com



LaptopVANG.com

